



SUNBLOCK

850 g/m² PES/PVC Blackout



DICKSON[®]
solar fabrics

SUNBLOCK

5 ANS*
YEARS
GARANTIE - WARRANTY




UPF 50+

g/m²
850 g/
m²

M2 / B1 / BS
NFPA701
B-S2-D0

3m


SUNBLOCK



SBL 7279


3.00 m x 60-200 ml
2.50 m x 60-200 ml

SUNBLOCK CARBON



SBC 7543

3.00 m x 30-60 ml



SBC 7544


3.00 m x 30-60 ml



SBC 7545


3.00 m x 30-60 ml

SUNBLOCK LIN




SBL 7570

(RAL 1013)
3.00 x 60-200 ml



SBL 7463

3.00 m x 30-60 ml



SBL 7464


3.00 m x 30-60 ml



SBL 7469

3.00 m x 30-60 ml

SUNBLOCK MOSAIC




SBL 7398

3.00 m x 60-200 ml




SBL 7510

3.00 m x 30-60 ml



SBL 7511

3.00 m x 30-60 ml




SBL 7512

3.00 m x 30-60 ml

BICOLOR




SUNBLOCK 3D




SBL 0654

3.00 m x 60-200 ml




SBL 7506

2.50 m x 60-200 ml



SBL 7481

3.00 m x 30-60 ml



SBL 7482

3.00 m x 30-60 ml

Base cloth <i>Support / Trägergewebe</i> <i>Soporte / Supporto</i>	1100 dtex PES HT
Width <i>Laize / Breite / Ancho / Altezza</i>	2.50 - 3.00 m
Coating <i>Enduction / Beschichtung</i> <i>Revestimiento / Spalmatura</i>	PVC (Lowick)
Finish <i>Finition / Ausstattung / Acabado /</i> <i>Finizione</i>	Cleangard
Total weight <i>Poids Total / Gesamtgewicht</i> <i>Peso total / Peso totale</i>	850 g/m ²
Tensile strength > NF EN ISO 1421 <i>Résistance rupture / Reissfestigkeit /</i> <i>Resistencia a la rotura / Resistenza alla</i> <i>rottura</i>	260/250 daN
Tear strength > DIN 53363 <i>Résistance déchirure / Weiterreissfes-</i> <i>tigkeit Resistencia al desgarrar</i> <i>Resistenza allo strappo</i>	32/28 daN
Adhesion > NF EN ISO 2411 <i>Adhérence / Haftung</i> <i>Adherencia / Aderenza</i>	8 daN / 5 cm
Elongation under load (W / W) > NF EN 15619 <i>Allongement sous charge (Ch / Tr)</i> <i>Verbleibende Verformung (K / S)</i> <i>Alargamiento bajo carga (urdimbre /</i> <i>trama)</i> <i>Allungamento sotto carico (ordito /</i> <i>trama)</i>	<1% / <2%
Residual deformation (W / W) > NF EN 15619 <i>Déformation résiduelle (Ch / Tr)</i> <i>Dehnung unter Last (K / S)</i> <i>Deformación residual (urdimbre /</i> <i>trama)</i> <i>Deformazione residua (ordito / trama)</i>	<0.4% / <0.8%
Temperature resistance > NF EN 1876-2 <i>Températures d'utilisation</i> <i>Temperaturbeständigkeit</i> <i>Resistencia máxima a la temperatura</i> <i>Resistenza alla temperatura</i>	-30°C +70°C (24h)
Flame Retardancy > NF P 92503 / DIN 4102 / BS 7837 <i>Ignifugation / Brennverhalten</i> <i>Ignifugación / Ignifugazione</i>	M2 / B1 / BS NFPA701 B-S2-D0



Dickson PVC fabrics are recyclable

Les produits PVC Dickson sont recyclables

Alle PVC-beschichteten Dickson Produkte sind recyclebar

Todos los artículos recubiertos de PVC Dickson son reciclables

Tutti i prodotti in PVC Dickson sono riciclabili



Other colours are available on special production

Autres coloris possibles sur fabrications spéciales

Andere Farbe mit Sonderproduktion möglich

Otros colores disponibles bajo pedido mínimo

È possibile realizzare colori diversi per produzioni speciali



All PVC coated fabrics can be slit

Tous les articles enduits PVC sont tronçonnables



Für alle PVC-beschichteten Produkte gibt es den Schneide-Service

Todos los artículos recubiertos de PVC se pueden cortar







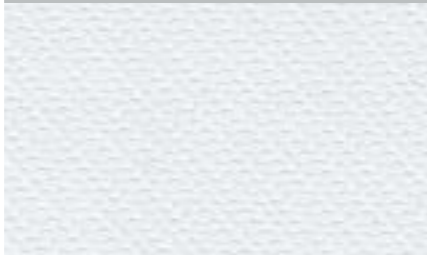






























Tutti i prodotti spalmati in PVC si possono tagliare nella misura desiderata

Average values, non-contractual
Valeurs moyennes, non-contractuelles / Alle angegebenen Werte sind ca. Werte / Valores medios y no contractuales / Questi valori medi non hanno valore contrattuale





SUNBLOCK

COLOR			Gtot EXT			
7279	72	28	0,02		0	
7570	63	37	0,03		0	
7398	68	32	0,03		0	
654	45	55	0,05		0	
7506	72	28	0,02		0	
7543	72	28	0,02		0	
7544	68	32	0,03		0	
7545	45	55	0,05		0	
7463	72	28	0,02		0	
7464	68	32	0,03		0	
7469	45	55	0,05		0	
7510	16	84	0,08		0	
7511	68	32	0,03		0	
7512	45	55	0,05		0	
7481	72	28	0,02		0	
7482	68	32	0,03		0	



Thermal Comfort

Confort Thermique / Wärme-Komfort
Confort Térmico / Comfort Termico



Visual Transmission (%)

Transmission Visuelle (%) / Licht Transmission (%)
Transmisión Visual (%) / Transmissione Visiva (%)



Visual Protection

Protection Visuelle / Visueller Schutz
Protección Visual / Protezione Visiva



UPF 50+

UV Protection 100%

Protection UV 100% / UV-Schutz 100%
Protección UV 100% / Protezione U.V. 100%



Solar Reflexion (%)

Réflexion Solaire (%) / Wärme Reflektion (%)
Reflexión Solar (%) / Riflessione Solare (%)



Solar Absorption (%)

Absorption Solaire (%) / Wärme Absorption (%)
Absorción Solar (%) / Assorbimento Solare (%)



Solar factor of the combination of fabric + reference glazing C

Facteur solaire de l'ensemble toile + vitrage de référence C





Gesamtenergiedurchlassgrad der Kombination Verglasung C + Sonnenschutz

Factor solar de la combinación del tejido + vidrio de referencia C


Fattore solare dell'insieme telo + vetro di riferimento C

SYSTEM LOWICK

Dickson's unique anti-wicking process helps the fabric to last longer and look like new.

-  *Traitement spécifique à Dickson pour empêcher la moisissure par capillarité. Le tissu dure plus longtemps et garde son aspect d'origine.*
-  *Das einzigartige Herstellungsverfahren von Dickson verhindert Schimmelbildung. Das Gewebe hat eine längere Lebensdauer und behält seine ursprüngliche Optik.*
-  *Tratamiento específico de Dickson para evitar el moho por capilaridad, ayuda al tejido a durar más tiempo y se vea como nuevo.*
-  *Trattamento specifico Dickson per impedire la muffa per capillarità. Il tessuto aumenta la sua durata nel tempo mantenendo il suo aspetto originale.*


Classic coatings

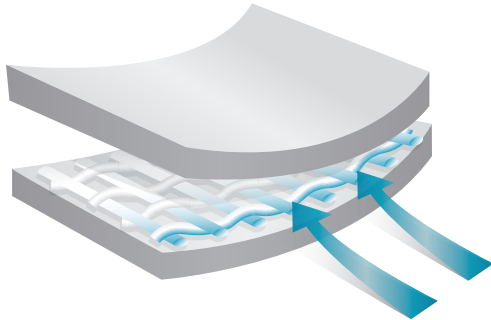

Moisture penetration

Enduction classique : pénétration de l'humidité
Klassisches Beschichtungsverfahren : feuchtigkeitsdurchdringung
Recubrimiento clásico : penetración de humedad
Spalmatura classica : penetrazione dell'umidità

Dickson's LOWICK System

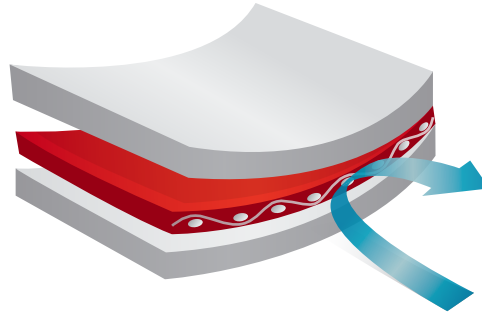





Total coating impregnation of the yarn

Imprégnation totale des fils dans la matière
Vollständige Imprägnierung des Garns im Gewebe
Impregnación total del hilo del material
Impregnazione totale dei fili nel materiale

FINITION CLEANGARD

The smooth Cleangard topcoat lacquer prevents soiling and facilitates cleaning. A solid protection against weathering.

-  *Traitement sur les deux faces pour un état de surface lisse et moins salissant. Une protection résistante aux intempéries.*
-  *Oberflächenbehandlung auf beiden Seiten für eine glatte und stärker schmutzabweisende Oberfläche. Wirksamer Schutz gegen Witterungseinflüsse.*
-  *Tratamiento en las dos caras para conseguir una superficie lisa y más limpia. Una protección resistente a la intemperie.*
-  *Trattamento sulle due facce per garantire una superficie liscia e meno sensibile allo sporco. Una protezione resistente alle intemperie.*

MADE IN
 **FRANCE**

 **REACH**
COMPLIANCE



ADVANTAGES

Avantages / Vorteile / Ventajas / Ventaggi



All-weather resistant
Résistant aux intempéries / Wetterbeständig
Resistente a la intemperie / Resistente alle intemperie



Easier to clean
Plus facilement nettoyable / Leichter zu reinigen
Más fácil de limpiar / Più facile da pulire



Very good weldability
Très bonne soudabilité / Sehr gute Schweißbarkeit
Muy buena soldabilidad / Ottima saldabilità



Longer life
Plus de longévité / Längere Lebensdauer / Mayor vida útil / Maggiore durata



Suppleness
Souple / Flexibilität / Flexibilidad / Buona flessibilità



Smoother surface, less prone to soiling.
Plus lisse et moins adhérente aux salissures / Glatter und weniger schmutzanfällig
Más lisa y menos adherente para las manchas / Più liscia e meno sensibile allo sporco.



10 rue des Châteaux
 BP 109 - Z.I. La Pilaterie
 59443 Wasquehal Cedex - France
 www.dickson-constant.com
 contact@dickson-constant.com
 Tél. +33 (0)3 20 45 59 59

Performance fabrics for

Solar protection
 Outdoor furniture
 Indoor furniture
 Marine furnishing
 Flooring


DICKSON[®]
 innovative textiles for your world


GLEN RAVEN[™]

Edition September 2017 - SAS DICKSON CONSTANT - capital 12.640.000 euros - 381 347 970 R.C.S. Lille Métropole - Glen Raven[™] is a trademark of Glen Raven, Inc. - Dickson Constant is a Glen Raven company - *see general warranty conditions on www.dickson-constant.com